

Product Brochure For L188D

Centre Lathe - AL-540C

356 x 1000mm Turning Capacity



| | |
|-------------------------------------------------|-----------------|
| ORDER CODE: | L188D |
| MODEL: | AL-540C |
| Swing Over Bed (mm): | 356 |
| Distance Between Centres (mm): | 1000 |
| Spindle Bore (mm): | 38 |
| Swing In Gap (mm): | 506 |
| Swing Over Cross-slide (mm): | 220 |
| Digital Readout System Fitted: | Yes |
| Quick Change Toolpost Fitted: | Yes |
| Leadscrew Covers Fitted: | Yes |
| Taper Turning Attachment: | ~ |
| Coolant System: | Yes |
| Tool Height To Suit (mm): | 20 |
| Centre Height (mm): | 178 |
| Spindle Nose Size or Type: | D1-4 Camlock |
| Bed Width (mm): | 206 |
| Headstock Spindle Taper (MT): | 5 |
| Tailstock Taper (MT): | 3 |
| Cross Slide Travel (mm): | 180 |
| Compound Slide Travel (mm): | 100 |
| Leadscrew Type: | Metric |
| Metric Cross Feed (X-Axis) (mm/rev): | 0.015 ~ 0.220 |
| Imperial Cross Feed (X-Axis) (inch/rev): | ~ |
| Metric Longitudinal Feed (Z-Axis) (mm/rev): | 0.043 ~ 0.653 |
| Imperial Longitudinal Feed (Z-Axis) (inch/rev): | ~ |
| Metric Thread Steps & Pitch (No. / mm): | 48 (0.45 - 7.5) |
| Imperial Thread Steps & TPI (No. / TPI): | 40 (4 - 112) |
| 3 Jaw Chuck Diameter (mm): | 160 |
| 4 Jaw Chuck Diameter (mm): | 200 |
| Spindle Steps / Speeds (No. / rpm): | 8 (90 - 1800) |
| Motor Power (kW / hp): | 2.25 / 3 |
| Voltage / Amperage (V / amp): | 240 / 15 |
| Nett Weight (kg): | 880 |

Features

- 2 Axis digital readout system
- Quick change toolpost with 4 holders
- Concertina leadscrew cover
- Gear drive headstock for quick change of spindle speeds
- Cast iron stand increasing rigidity and reducing vibration
- Precision 'V'-beds are hardened and ground, incorporating a rigid webbed casting
- Low voltage work light
- Foot operated spindle brake with safety cut out switch
- Change gears for metric and imperial thread cutting
- Oil sight glass for head stock and gearbox
- Adjustable taper roller bearings support the spindle
- Overload clutch mechanism on auto power feed
- Micro-adjustable length-stop on bed-way for accurate repetitive operation
- 3HP/415V motor 16-speed(45-1800rpm)
- Inching button is incorporated on the control panel for convenient spindle speed selection
- Enclosed quick action gearbox for thread cutting and auto feeding
- Powered longitudinal and cross feeds
- D1-4 camlock spindle for quick chuck changes and safe reverse-direction turning. ISO standard
- Removable gap bed-way for larger diameter jobs
- Dual calibrated dials (except for saddle handwheel)
- Chuck & change gear guards are fitted with micro switches
- Coolant system with flexible hose
- Slide out swarf tray

Product Brochure For L188D

Includes

- 2 Axis digital readout system
- Quick change toolpost with 4 holders
- Concertina leadscrew cover
- 160mm 3-jaw chuck with reverse jaws
- 200mm 4-jaw chuck
- Faceplate
- Fixed Steady
- Travelling Steady
- Change gears
- Dead centres
- Thread-chasing dial
- Work light
- Cast iron stand
- Foot brake
- Rear splash guard & Swarf tray
- Toolbox
- Instruction booklet

Recommended Accessories

C052
3MT Live Centre

L0098
Carbide Inserts - General Purpose

L0099
Lathe Turning Tool Kit - 7 piece Insert Type

L450
Lathe Turning Tool Kit - 3 piece Insert Type




L464
Professional Lathe Parting Tool Kit - Insert Type

L341
Fitting and Machining Technical Book

L3455
Professional Sheet Metal Fabrication Book

L076
Knurling Tool Holder Kit

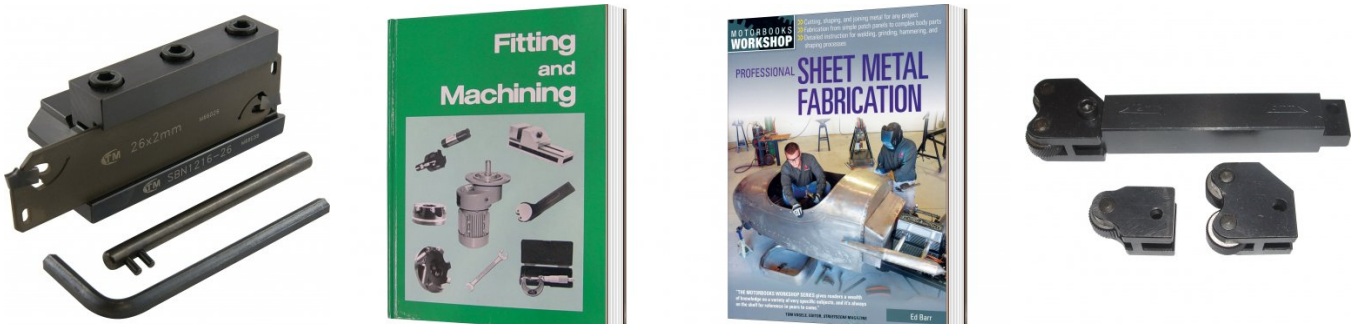

Product Brochure For L188D

L295A
 Quick Change Toolpost Holder - Std



L295
 Quick Change Toolpost



C290
 Heavy Duty Drill Chuck - Keyed Type



D443A
 3MT x JT3 Drill Chuck Arbor

D1272
 Metric 135° Precision HSS Drill Set - 25 Piece



D1282
 Imperial 135° Precision HSS Drill Set - 29 Piece



D126
 Metric 135° Precision HSS Drill Set - 170 Pieces



C980
 5C Collet Lathe Adaptor




L277
 Vertical Mill Slide



M800
 Rubber Mat - Anti-Fatigue



M805
 Rubber Mat - Anti-Fatigue



S090A
 Soluble Metal Cutting Fluid - 1 Litre



Product Brochure For L188D

S090

Soluble Metal Cutting Fluid - 5 Litre



S076

Cutting Tool Lubricant Fluid - 500ml



S077

Drilling, Tapping & Cutting Tool Lubricant Spray - 400g



S075

Cutting Tool Lubricant Paste - 200g



S074

Cutting Tool Lubricant Paste - 500g



O000

SpillFix Universal Organic Absorbent



O043

Rust & Corrosion Preventive



O042

General Purpose Lubricant & Corrosion Inhibitor



O040

Rust & Corrosion Preventive



O044

Rust & Corrosion Preventive

