

Product Brochure For S795D

Motorised Plate Curving Rolls - IRM2550x140

2550 x 2.5mm Mild Steel Capacity

Hardened Rolls, Motorised Up/Down Rear Roll, DRO Control Panel & Initial Pinch Design

Special Order

Ex GST

Inc GST

\$29,950.00 \$32,945.00



| | |
|--|-------------------|
| ORDER CODE: | S795D |
| MODEL: | IRM2550x140 |
| Curving System Type: | Initial Pinch |
| Curving Material Length (mm): | 2550 |
| Curving Plate Thickness - Mild Steel (mm): | 2.5 |
| Minimum Rolling Diameter (mm): | 210 |
| Roll Diameter (mm): | 140 |
| Motor Power (kW / hp): | 2.2 / 3 |
| Voltage / Amperage (V / amp): | 415 |
| Dimensions (LxWxH) (mm): | 3700 x 750 x 1000 |
| Floor Space (L x W x H) (mm): | ~ |
| Nett Weight (kg): | 1850 |



Features


- SAE 1050 (CK45) certificated forged steel rolls with high tensile strength
- Precision ground and hardened rolls
- Cast Iron end frames
- Brake motor standard for precision bending
- Digital readout control panel with emergency stop
- Safety trip wire (RM & IRM) or kick bar (IR) standard
- Conical bending device
- Single handle adjustment of bottom rolls
- Made in Turkey
- Models available to 2550 x 140mm

- Mild steel capacity is rated on hot rolled material with 250MPA

Includes

- Standard manual drop end

Initial Pinch Style Rolls

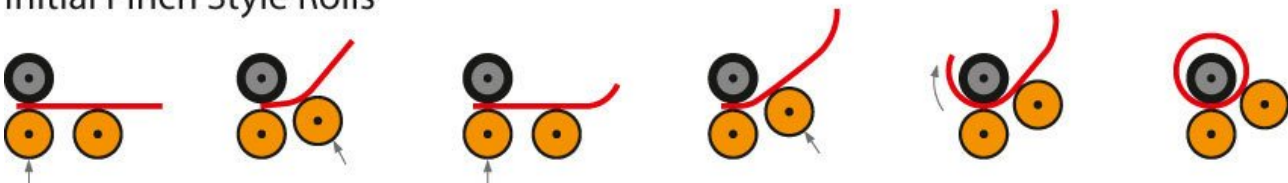

Product Brochure For S795D

Specific Features



Standard Manual Drop End



Shown with Optional Ball Transfer Tables - Order Code (L840)