

Product Brochure For C5361

Rotary Screw Pilot Air Compressor - PAC7.5-RM

Italian Designed & Manufactured Air End
 1002L/Min. 35.3CFM @ 10 Bar

Ex GST **Inc GST**
\$10,900.00 **\$11,990.00**



ORDER CODE:	C5361
MODEL:	PAC7.5-RM
Free Air Delivery (LPM / CFM):	1002 / 35.3
Air Displacement (LPM / CFM):	~
Includes Air Dryer System (Yes / No):	No
Standard Operating Pressure (bar):	10
Air Receiver Tank (Litre):	268
Noise Level (dBA):	68
Transmission Drive (Type):	Belt Drive
Motor power (kW / hp):	7.5 / 10
Motor Voltage (V / Amps):	415
Dimensions (L x W x H) (mm):	1500 x 650 x 1650
Nett Weight (kg):	275



Description

The PAC series: The choice for your workshop or industrial requirements all with Pilot Air's Legendary reliability & long life value

Features


- ETMII - Installed on models from 4 to 15kW
- Controller with multi-function backlight display, the menu is alphanumeric type. In the main screen are displayed:
 - Working pressure (offload/load)
 - Oil temperature
 - Total working hours
 - On-load working hours
 - Compressor status led (stand-by, offload, load)
 - Hours remaining before maintenance
 - Four maintenance timers (air cartridge, oil, oil filter, oil separator)
 - Automatic re-start after power failure
 - Cooling fan temperature settable
 - Compressor remote start settable
 - Integrated sequence phase relay
 - Easily accessible for service & maintenance
- Remote monitoring (on demand)
- GSM/GPRS/Ethernet/WiFi module (for online compressor status, remote assistance, connection with PC, Smartphone and Tablet, connection between neighbour compressors)
- Master/slave function
- It is possible to connect up to 4 compressors for managing distribution of the workload in such a way to equalize the hours dynamically changing set pressures of the various compressors
- Italian Designed & Manufactured Air End
 - High efficiency and reliability
 - Lower air end speeds mean reduced wear and longer life
 - Designed for continuous operation without a drop in performance
- Poly – V Belt Driven

Product Brochure For C5361

- - Long life and minimum maintenance
- Simple Maintenance
 - - Easily accessible internal components ensure efficient maintenance
- Cooling System
 - - Thermally controlled independent radial fan ensures constant air/oil temperatures even during heavy working conditions
- F.A.D. as per ISO1217 @ 7.5 - 9.5 Bar
 - - Sound level measured in accordance with PNEUROP / CAGI Standards.
 - - Technical data conforms to +/- 5%. Pilot Air reserves the right to modification without notice for design and technical improvements
- Warranty: 2 years on compressor pump, 1 year on all other components.

Optional Accessories

- Please note: for superior quality dry air it is recommended to use a refrigerated air dryer, pre-filter & after-filter with this system

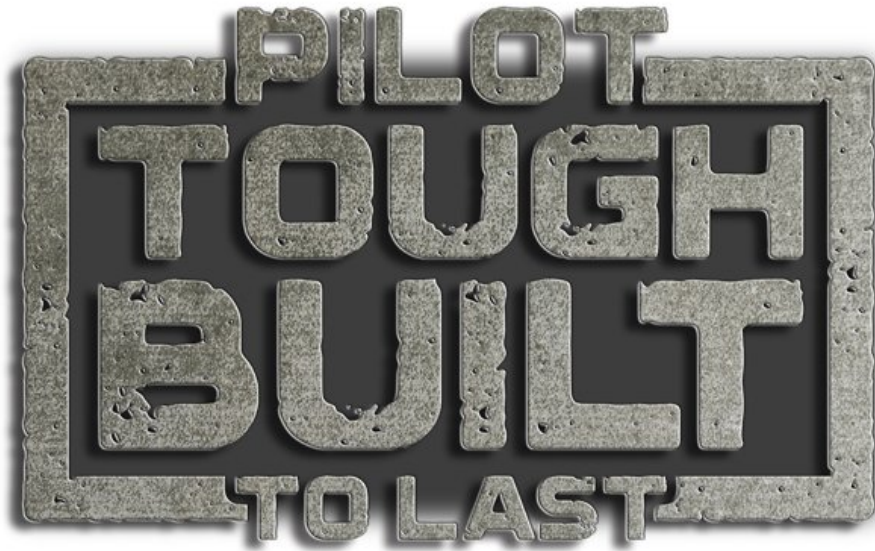

Recommended Accessories

C5362
 Rotary Screw Pilot Air
 Compressor & Integrated Air
 Dryer



C546A
 3 Micron Pre-Filter for
 Refrigerated Air Dryer - 1/2"
 BSPF



C546B
 0.1 Micron Post-Filter for
 Refrigerated Air Dryer - 1/2"
 BSPF

